

FeV



MIO™ Acquisition

Smart solution
for testing measurements

feel evolution




The most suitable acquisition solution for your testcell

FEV MIO™ Acquisition range has been developed to provide a high level of integration with MORPHEE® automation system. Featuring excellent acquisition and control performances thanks to the EtherCAT technology, it is the perfect solution for measurement boombox or mobile measurement racks of test beds but also for embedded applications including e-mobility.

With FEV solutions, boost your acquisition capacities!

MIO™ product range provides performant, robust and accurate measurements of all relevant signals in any kind of test beds.

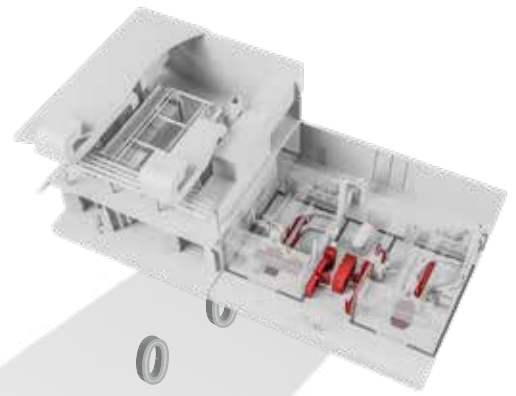

EtherCAT 

(Ethernet for
Control and

Automation Technology) is an Ethernet solution for industrial automation offering exceptional performance while being very easy to use. The master bus requires no additional extension board, and can be easily implemented on any Ethernet adapter. EtherCAT is especially well-suited for control-command systems that use remote I/O, such as automotive test cells.

Your benefits

- High integration with MORPHEE®
- Direct EtherCat connectivity
- Compact and modular
- Simple and reliable
- Easy maintenance and updates



MIO A03



MIO A04



MIO A06

- 8 Analog inputs module
- ± 50 V, ± 30 V, ± 10 V, ± 5 V, ± 2 V, ± 1 V or 0...25 mA
- 24 bit resolution
- 20 kHz sampling rate per channel
- Binder 8 pins plugs
- +9...30 VDC supply

- 8 Analog outputs module
- ± 10 V or 0...20 mA
- 16 bit resolution
- 20 kHz sampling rate per channel
- 500 Vpk isolation channel by channel
- Binder 7 pins plugs
- +9...30 VDC supply


- 8 Insulated analog inputs module
- ± 50 V, ± 30 V, ± 10 V, ± 5 V, ± 2 V, ± 1 V, or 0...25 mA
- 24 bit resolution
- 20 kHz sampling rate per channel
- Binder 8 pins plugs
- +9...30 VDC supply



MIO T10



MIO T11



MIO D01

- 16 Thermocouples module
- Type: K, J, T, E, N, R, S, B
- 24 bit resolution
- 100 Hz sampling rate per channel
- 500 Vpk isolation channel by channel
- Mini TCU plugs
- +9...30 VDC supply

- 16 Thermocouples module
- Type: K
- 24 bit resolution
- 100 Hz sampling rate per channel
- 500 Vpk isolation channel by channel
- Mini TCU plugs
- +9...30 VDC supply

- 16 Digital channels module
- 8 x TTL or HTL inputs PWM, Period and frequency measuring
- 8 x TTL or relay outputs PWM, state and frequency control up to 100 kHz
- Sensor supply 5 VDC
- 20 kHz sampling rate per channel
- Weidmuller terminal with clamps
- +9...30 VDC supply



MIO R02



MIO R03S



MIO F01

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> ■ 8 Resistance inputs module ■ 2, 3 or 4 wires ■ PT100, PT1000 or Potentiometer ■ 24 bit resolution ■ 100 Hz sampling rate per channel ■ 500 Vpk isolation channel by channel ■ Binder 8 pins plugs ■ +9...30 VDC supply | <ul style="list-style-type: none"> ■ 8 Resistance outputs module ■ 10 Ω to 1 MΩ ■ 0.25 Ω resolution ■ 5 Hz sampling rate per channel ■ 500 Vpk insulation channel by channel ■ Banana plugs ■ +9 ... 30 V supply | <ul style="list-style-type: none"> ■ 4 Frequency inputs rack ■ 0.2 Hz to 360 kHz ■ Torque, speed, acyclism, position or frequency measurements ■ Binder 12 pins, DIN8 and BNC plugs ■ +9 ... 30 V supply |
|---|---|---|



MIO D02



MIO D03



MIO D04

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> ■ 16 Digital inputs module ■ TTL or HTL ■ PWM, period and frequency measuring ■ Sensor supply 5 VDC ■ 20 kHz sampling rate per channel ■ 500 Vpk isolation (2 by 2) ■ Weidmuller terminal with clamps ■ +9...30 VDC supply | <ul style="list-style-type: none"> ■ 16 Digital outputs module ■ Solid-state relays 500 mA / 50 V (dry contact) ■ TTL 0...5 V ■ SENT, PWM, state and frequency ■ control up to 360 kHz ■ Sensor supply 5 Vdc ■ 20 kHz sampling rate per channel ■ Weidmuller terminal with clamps ■ +9...30 VDC supply | <ul style="list-style-type: none"> ■ 8 Digital outputs module ■ Electromechanical relays ■ 8 A / 100 V (dry contact) ■ State control ■ 20 kHz sampling rate per channel ■ 500 Vpk isolation channel by channel ■ Weidmuller terminal with clamps ■ +9...30 VDC supply |
|---|---|---|



MIO A05

- 16 Analog inputs rack
- $\pm 50\text{ V}$, $\pm 30\text{ V}$, $\pm 10\text{ V}$, $\pm 5\text{ V}$, $\pm 2\text{ V}$, $\pm 1\text{ V}$ or $0\ldots 25\text{ mA}$
- 24 bit resolution
- 20 kHz sampling rate per channel
- 500 Vpk isolation channel by channel
- Binder 8 pins plugs (Variant A07 Binder 6 pins ; variant A09 – M12 A 8 pins – quantity 20 min)
- $+9\ldots 30\text{ VDC}$ supply



MIO D05

- Plugs BINDER 3 points
- 8 x Digital inputs: TTL HTL, state, PWM, frequency or period
- 8 x Relay outputs: 2A Relay, state
- 2 x Analog outputs $\pm 10\text{ V}$
- 2 x Digital outputs TTL $0\ldots 5\text{ V}$
- 2 x Digital outputs dry contact $500\text{ mA} / 50\text{ V}$



MIO P03

- 8 Analog inputs rack dedicated to pressure transducers
- 1 U
- $\pm 10\text{ V}$, $0\ldots 25\text{ mA}$
- 24 bit resolution
- 20 kHz sampling rate per channel
- $+9\ldots 30\text{ V}$ supply



MIO A08

- 8 Analog outputs rack
- ± 10 V, 0...20 mA
- 16 bit resolution
- 20 kHz sampling rate per channel
- Binder 5 pins plugs
- +9 ... 30 V supply



MIO R04

- 16 Resistance inputs rack
- PT100 PT1000
- 24 bit resolution
- 100 Hz sampling rate per channel
- 500 Vpk insulation channel by channel
- Binder 6 pins plugs
- +9 ... 30 V supply



MIO P04

- 8 Analog inputs rack dedicated to pressure transducers
- 2 U
- ± 10 V, 0...25 mA
- 24 bit resolution
- 20 kHz sampling rate per channel
- +9 ... 30 V supply

HIGH VOLTAGE MIO RACKS



MIO A10

- 16 x Isolated analog inputs Channels
- $\pm 100\text{ V}$, $\pm 30\text{ V}$, $\pm 10\text{ V}$, $\pm 3\text{ V}$
- 24 bit resolution
- 20 kHz sampling rate per channel
- Isolation: 1000 V CAT II & 600 V CATIII
- Banana plugs (4mm)
- $+9\dots+30\text{ Vdc}$



MIO A11

- 4 x High voltage Inputs – 4 x Current sensors Channels
- $\pm 1400\text{ V}$, $\pm 700\text{ V}$, $\pm 280\text{ V}$, $\pm 140\text{ V}$
- 1000 V CAT II & 600 V CATIII
- Banana plugs (4mm)
- $\pm 2000\text{ A}$, $\pm 50\text{ A}$ (HIOKI Current transducers)
- $\pm 10\text{ V}$, $\pm 5\text{ V}$, $\pm 2\text{ V}$, $\pm 1\text{ V}$ or $\pm 25\text{ mA}$
- 60 Vdc – 500 Vpk
- BNC & ME15W
- 24 bit resolution
- 500 kHz sampling rate per channel
- $+10\dots+30\text{ Vdc}$



To build the largest High Voltage Battery Test Center in the world, FEV STS has increased its MIO™ range with High Voltage racks. This range is able to meet all your needs in high voltage battery testing.

DYNABOX

“A universal box for the monitoring of all FEV dynamometers”



The DYNABOX is dedicated to the monitoring management of FEV DYNACRAFT dynamometers. This unit integrates a lot of channels for dedicated monitoring functions: Torque, Speed, PT100, PTC, Vibration measurements or digital inputs.

DYNABOX

TECHNICAL DATA

Technical specifications

Inputs:

- 4 x PT100
- 2 x PTC / PT1000 / PT100
- 4 x Digital input
- 4 x Vibration 4-20 mA
- 1 x Speed (Incremental encoder)
- 1 x Torque (Frequency signal)
- 3 x Slots for optional input

Outputs:

- 4 x Digital output (Dry contact)
- 1 x Summary digital output (Relay)
- 2 x Speed in Frequency (Input copy)
- 1 x Torque in Frequency (Input copy)
- 1 x Torque in Voltage (Measurement value)

Interfaces:

- Ethernet (Web server)
- EtherCAT
- Power supply: 9-30 Vdc
- Operating temperature: -20...+60°C
- Protection class: IP54
- EMC: IEC61326-1
- Size (W x H x D): 410 x 250 x 110 mm
- Weight: ~ 5,0 kg
- Scope of supply
- 1 x DynaBox
- 1 x User manual in English or in French



Are you interested in innovative,
pioneering software solutions?

Contact us!

FEV Test Systems
www.fev-sts.com | sales@fev.com

